
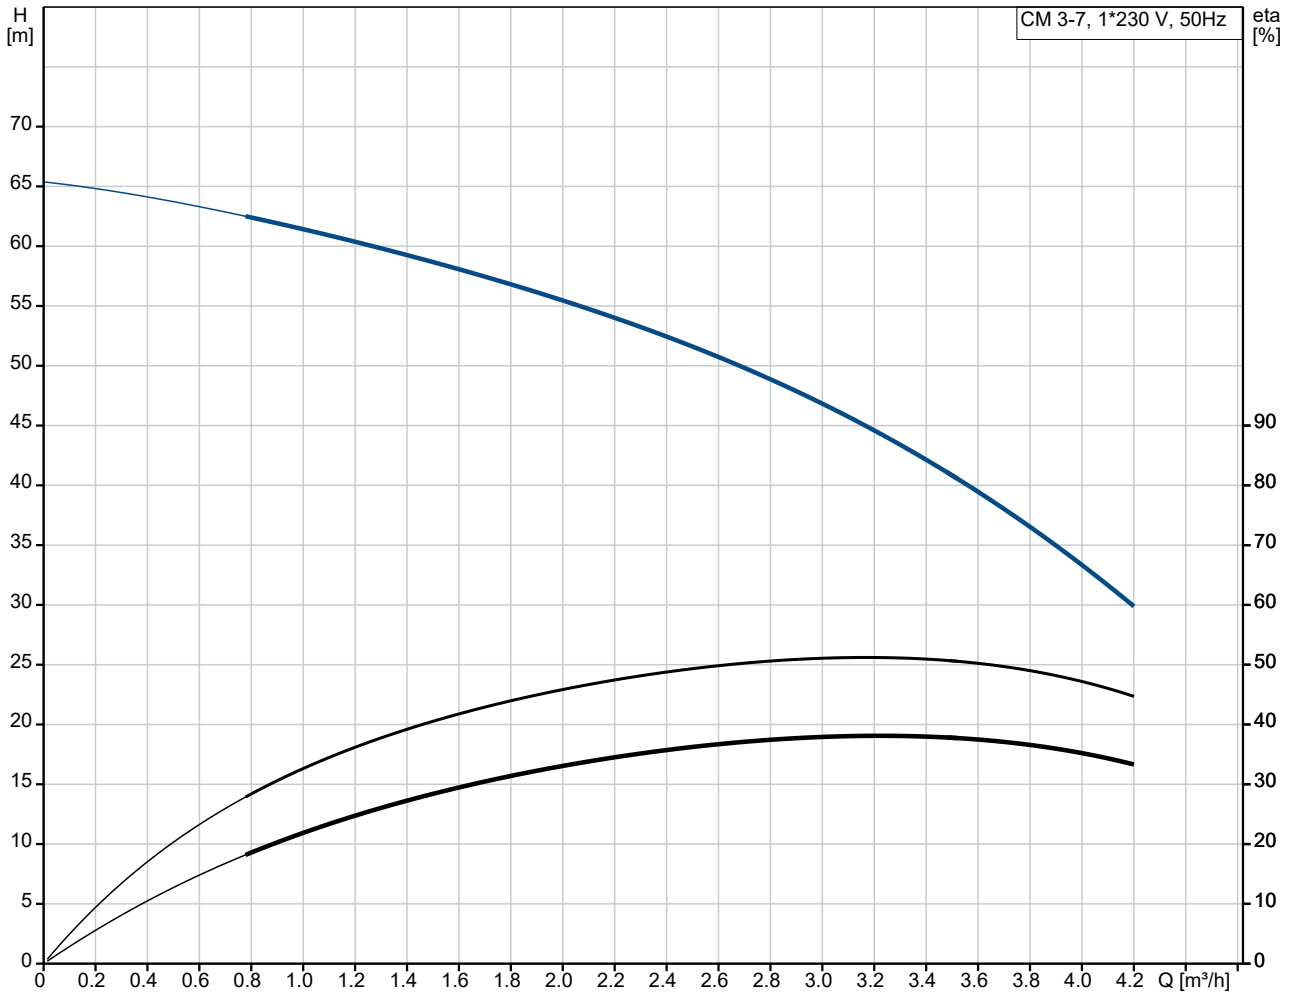



Qty.	Description
1	<p data-bbox="201 159 564 188">CM 3-7 A-R-G-V-AQQV C-A-A-N</p>  <p data-bbox="592 506 1064 530" style="text-align: center;">Note! Product picture may differ from actual product</p> <p data-bbox="201 539 480 564">Product No.: On request</p> <p data-bbox="201 600 1458 674">Compact, reliable, horizontal, multistage, end-suction centrifugal pump with axial suction port and radial discharge port. Pump materials in contact with the liquid are in high-grade stainless steel. The mechanical shaft seal is a special designed, unbalanced O-ring seal. Pipework connection is via internal Whitworth pipe threads, Rp (ISO 7/1).</p> <p data-bbox="201 710 1070 734">The pump is fitted with a 1-phase, foot-mounted, fan-cooled asynchronous motor.</p> <p data-bbox="201 770 300 795">Controls:</p> <p data-bbox="201 797 636 824">Frequency converter: NONE</p> <p data-bbox="201 860 276 884">Liquid:</p> <p data-bbox="201 887 633 913">Pumped liquid: Water</p> <p data-bbox="201 916 691 943">Liquid temperature range: -20 .. 90 °C</p> <p data-bbox="201 945 628 972">Selected liquid temperature: 20 °C</p> <p data-bbox="201 974 695 1001">Density: 998.2 kg/m³</p> <p data-bbox="201 1037 314 1061">Technical:</p> <p data-bbox="201 1064 820 1090">Pump speed on which pump data are based: 2900 rpm</p> <p data-bbox="201 1093 655 1120">Rated flow: 3.1 m³/h</p> <p data-bbox="201 1122 655 1149">Rated head: 48.59 m</p> <p data-bbox="201 1151 636 1178">Code for shaft seal: AQQV</p> <p data-bbox="201 1180 732 1207">Approvals: CE,EAC,UKCA</p> <p data-bbox="201 1209 753 1236">Approvals for drinking water: WRAS,ACS,UBA</p> <p data-bbox="201 1238 759 1265">Curve tolerance: ISO9906:2012 3B</p> <p data-bbox="201 1301 308 1326">Materials:</p> <p data-bbox="201 1328 724 1417">Pump housing: Stainless steel EN 1.4401 AISI 316</p> <p data-bbox="201 1420 724 1509">Impeller: Stainless steel EN 1.4401 AISI 316</p> <p data-bbox="201 1545 325 1570">Installation:</p> <p data-bbox="201 1572 691 1599">Range of ambient temperature: -20 .. 55 °C</p> <p data-bbox="201 1601 636 1628">Maximum operating pressure: 16 bar</p> <p data-bbox="201 1630 718 1686">Max pressure at stated temp: 16 bar / 90 °C 16 bar / 90 °C</p> <p data-bbox="201 1688 596 1715">Type of connection: Rp</p> <p data-bbox="201 1718 633 1744">Size of inlet connection: 1 inch</p> <p data-bbox="201 1747 633 1774">Size of outlet connection: 1 inch</p> <p data-bbox="201 1776 596 1803">Outlet position: 12</p> <p data-bbox="201 1839 362 1863">Electrical data:</p> <p data-bbox="201 1865 608 1892">Motor standard: IEC</p> <p data-bbox="201 1895 608 1921">Frame size: 80B</p> <p data-bbox="201 1924 643 1951">Rated power - P2: 0.9 kW</p> <p data-bbox="201 1953 633 1980">Mains frequency: 50 Hz</p> <p data-bbox="201 1982 584 2009">Suitable for 50/60 Hz: N</p> <p data-bbox="201 2011 740 2038">Rated voltage: 1 x 220-240 V V</p> <p data-bbox="201 2040 616 2067">Service factor: 1.00</p> <p data-bbox="201 2069 667 2096">Rated current: 5.4-5.0 A</p>

Qty.	Description
1	<p>Starting current: 430-430 % Rated speed: 2750-2790 rpm Enclosure class (IEC 34-5): IP55 Insulation class (IEC 85): F Built-in motor protection: PTO Cable included (Yes/No): N</p> <p>Others: Terminal box position: 12 Minimum efficiency index, MEI ≥: 0.7 Net weight: 16.3 kg Gross weight: 18.8 kg Country of origin: TW Custom tariff no.: 84137042</p>





On request CM 3-7 A-R-G-V-AQQV C-A-A-N 50 Hz



Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

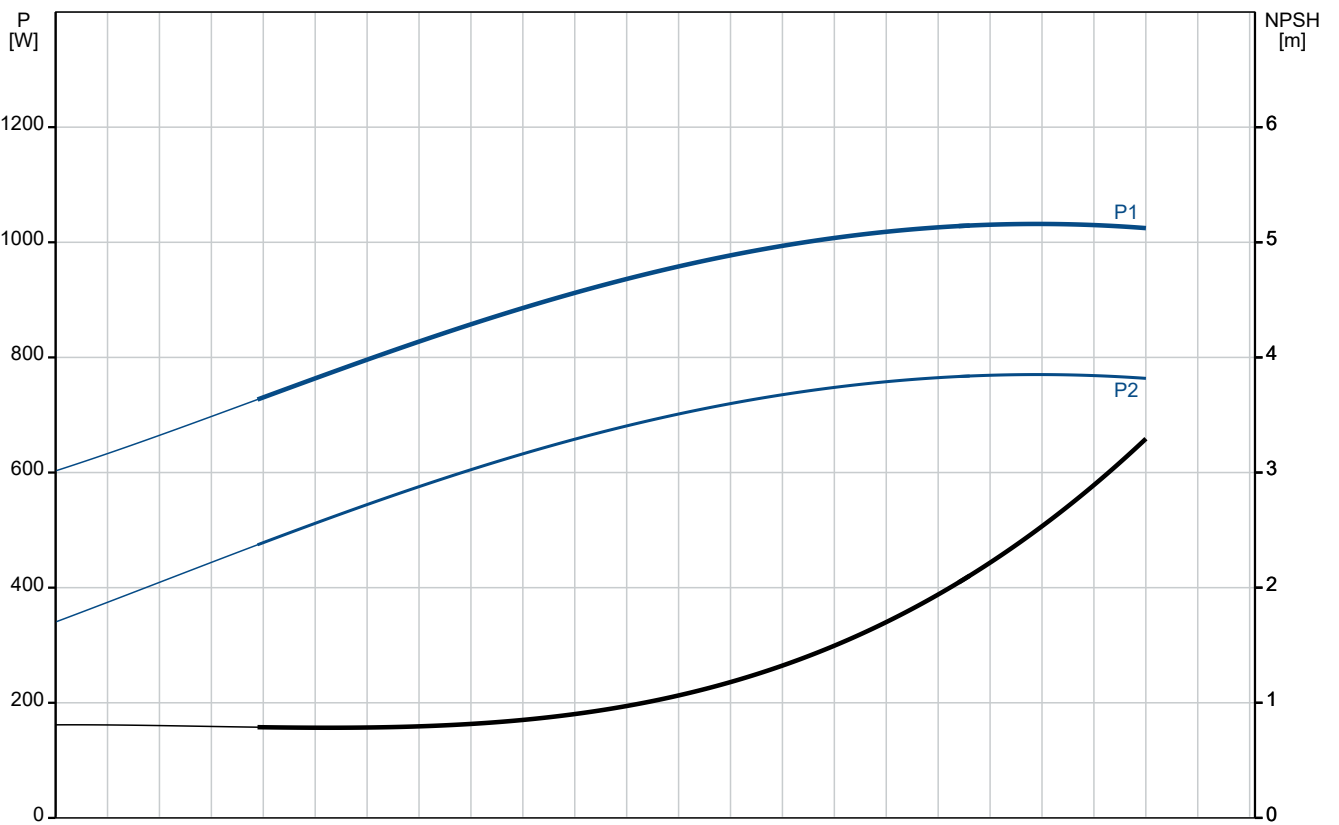

Description	Value
General information:	
Product name:	CM 3-7 A-R-G-V-AQQV C-A-A-N
Product No:	On request
EAN number:	On request
Technical:	
Pump speed on which pump data are based:	2900 rpm
Rated flow:	3.1 m ³ /h
Rated head:	48.59 m
Impellers:	7
Code for shaft seal:	AQQV
Approvals:	CE,EAC,UKCA
Approvals for drinking water:	WRAS,ACS,UBA
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	A
Materials:	
Pump housing:	Stainless steel
Pump housing:	EN 1.4401
Pump housing:	AISI 316
Impeller:	Stainless steel
Impeller:	EN 1.4401
Impeller:	AISI 316
Material code:	G
Code for rubber:	V
Installation:	
Range of ambient temperature:	-20 .. 55 °C
Maximum operating pressure:	16 bar
Max pressure at stated temp:	16 bar / 90 °C
Max pressure at stated temp:	16 bar / 90 °C
Type of connection:	Rp
Size of inlet connection:	1 inch
Size of outlet connection:	1 inch
Outlet position:	12
Connect code:	R
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-20 .. 90 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Motor standard:	IEC
Frame size:	80B
Rated power - P2:	0.9 kW
Mains frequency:	50 Hz
Suitable for 50/60 Hz:	N
Rated voltage:	1 x 220-240 V V
Service factor:	1.00
Rated current:	5.4-5.0 A
Starting current:	430-430 %
Rated speed:	2750-2790 rpm
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Built-in motor protection:	PTO
Cable included (Yes/No):	N
Controls:	
Frequency converter:	NONE
Others:	
Terminal box position:	12
Minimum efficiency index, MEI ≥:	0.7
Net weight:	16.3 kg
Gross weight:	18.8 kg
Country of origin:	TW

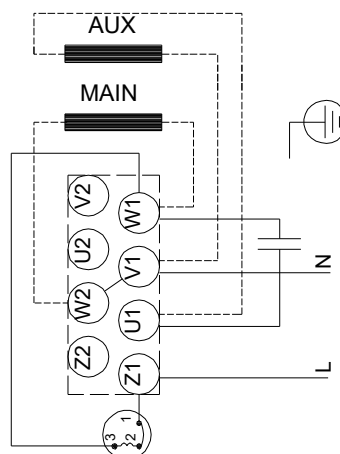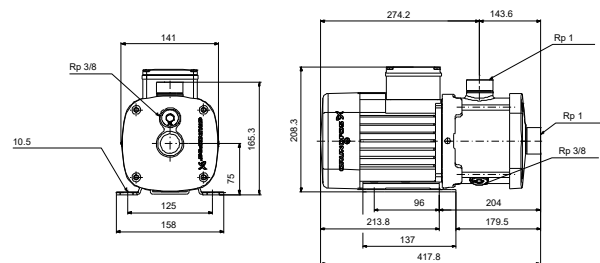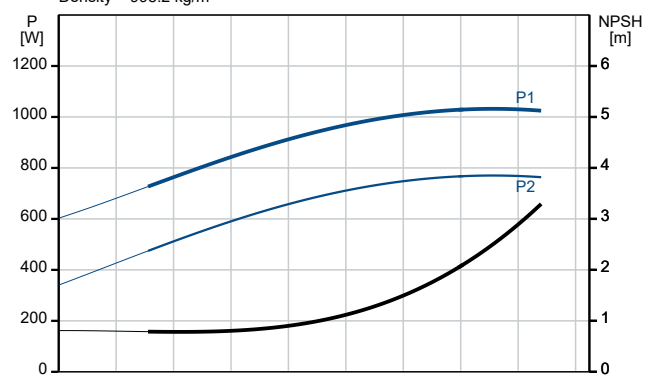
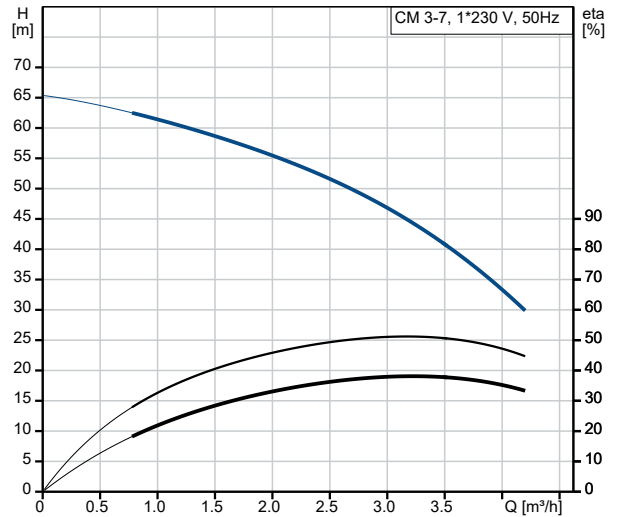


Description**Value**

Custom tariff no.:

84137042

On request CM 3-7 A-R-G-V-AQQV C-A-A-N 50 Hz

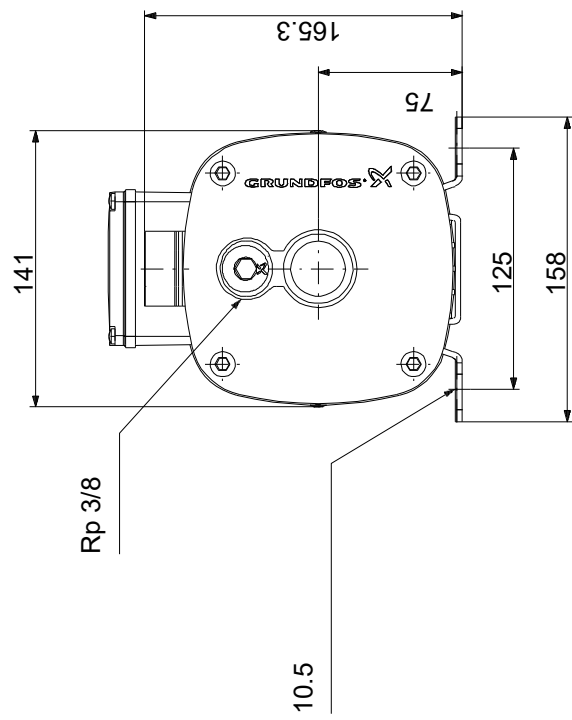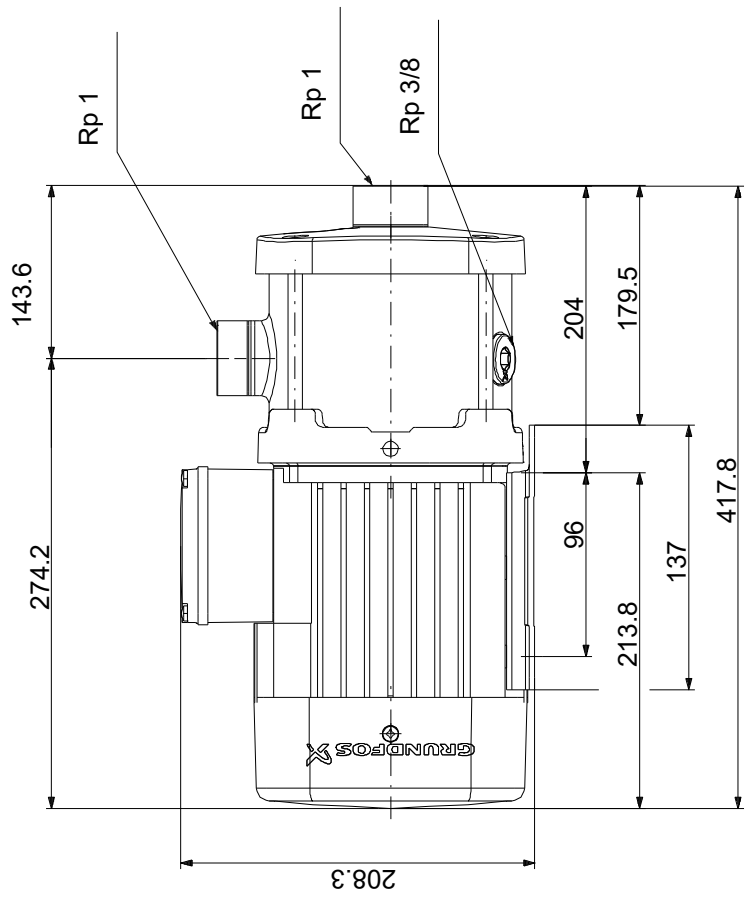

Note! All units are in [mm] unless others are stated.
 Disclaimer: This simplified dimensional drawing does not show all details.